

Container Lashings

Cargo Securement system for ocean container shipments



System Strength:	4.000 daN / 4 Tons
Strap Material:	100% Polyester
Strap Width:	38 / 50 mm
Stretch:	max. 5%
Color:	White / Red / Orange
Hardware:	Safety hook
Production:	Made in Germany



A complete lashing system consists of

- two single Lashings (1x left und 1x right)
- and the appropriate buckles with which the lashings are tensioned


The number of buckles is determined by the corresponding number of horizontal lashings.

Examples:	Lashings with 2 crosswise straps	= 200 single lashings + 200 buckles = 100 lashing systems as shown below
	Lashings with 3 crosswise straps	= 200 single lashings + 300 buckles = 100 lashing systems as shown below
	Lashings with 4 crosswise straps	= 200 single lashings + 400 buckles = 100 lashing systems as shown below

The specification "CV" describes the distance between the cross straps.

All other specifications of "CV" describe the remaining distances between the straps.

Examples:	Lashings with 2 cross straps	= CV 1.600
	Lashings with 3 cross straps	= CV 1.600 - 775/775
	Lashings with 4 cross straps	= CV 1.600 - 500/500/500 (see drawing)

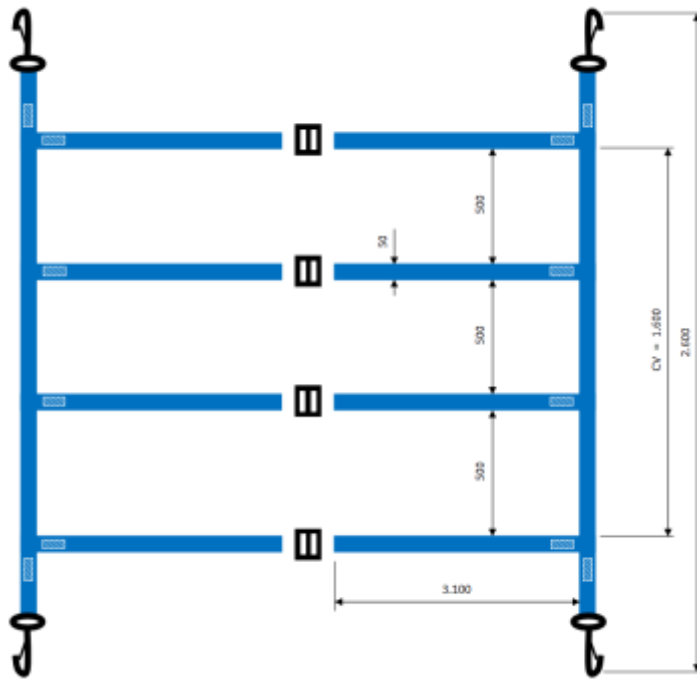

The length of the vertical straps is generally 2600mm to the safety hook.

These lashings can be used in standard and high cube containers.

The length of the horizontal straps is generally 3100mm which is more than sufficient for most loads.

Container Lashings Accessories

OWB 4040



OWB 5020



OWB 5050



RATCHET TENSIONER



REEL TENSIONER



POSITIONING AIDS

MAGNETS



5701 Cleveland St., Suite 350 | Virginia Beach, VA 23462 | 757-963-5211 | 844-963-5206
www.cargo-tuff.com